


# Woodoc Deck Dressing Specification Sheet

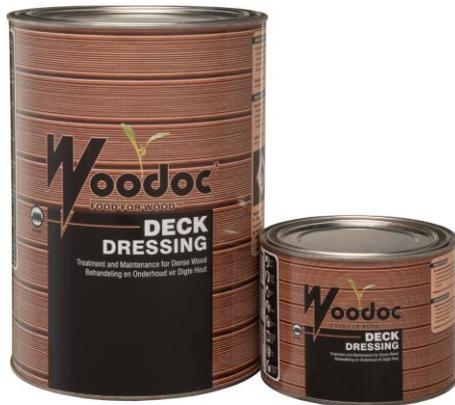

## Typical Application:

A tinted, matt oil finish for exterior application to hard, dense timber decking like Balau, Rhodesian Teak, Garapa or Iroko. Also suitable for roughly-sawn wood, e.g. wendy houses and fences. Recommended re-application: every 6 months or when wood looks dry.

## Product Features:

Woodoc Deck Dressing is oil-based with added transparent iron oxides to protect wood against harsh sunlight.

- Excellent wind, water, pollution and salt spray protection.
- Incorporates a special drying oil that remains flexible.
- Superior ultra-violet radiation protection in extreme conditions and is water-repellent.
- Low build characteristic for a smooth and attractive matt surface.
- Available in Golden Brown, Rich Meranti and Deep Brown.
- Penetrates deeply to nourish wood.
- Non-toxic when dry.
- Bio-degrades at the end of its life cycle.
- Complete how-to-use instructions on label.

**No:** WDD/006

**Dated:** 03/10/19

**Name:** Woodoc Deck Dressing – Exterior Matt Oil Finish (Rich Meranti / Deep Brown / Golden Brown)

## Description:

Tinted, matt finish with UV-protection and water repellence, for outdoor use.

## Coverage:

First coat 10-12 m<sup>2</sup>/litre. Subsequent coats 12-14 m<sup>2</sup>/litre. 3 coats (average) 3,3 m<sup>2</sup>/litre.

## Application:

By brush. Clean brush with mineral turpentine.

## Dilution:

Dilution is not recommended, but should dilution be necessary, use only mineral turpentine.

## Drying Time:

The different coats may take up to 48 hours to dry, depending on the weather. **Caution:** As the product does not form a hard film on the surface, shoes and furniture cushions could be affected for at least 48 hours after application.

## Product Properties:

Tinted, matt, exterior oil finish.

## Wax Content:

Medium.

## Compatibility:

Mineral Turpentine. **Non-Compatibility:** Acetone, Lacquer Thinners, Benzene, and other solvents.

## Packaging:

1 litre, 2,5 litres and 5 litres. (20 or 200 litres available on request from dealer)

**ALWAYS READ THE DIRECTIONS ON THE TIN BEFORE STARTING WORK.**

**FLAMMABLE.** Keep out of reach of children. Harmful when consumed. Ingestion may cause chemical pneumonitis. **IMPORTANT:** This product hardens through contact with air (oxygen). Replace lid firmly after use to prolong pot life.



Manufactured and marketed by:

Rekara Mills (Pty) Ltd

PO Box 16, Fort Beaufort 5720, South Africa

Tel +2746 645 1109 Fax +2746 645 1538

Customer Service:

Toll-Free during office hours 0800 411 200 (South Africa only)

E-mail: [information@woodoc.com](mailto:information@woodoc.com) or visit [www.woodoc.com](http://www.woodoc.com)